

FIG. 2

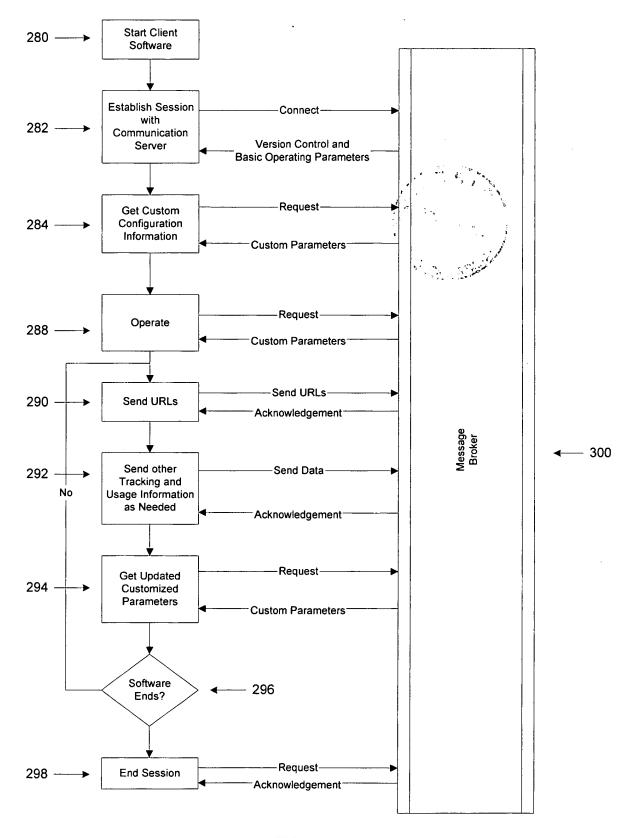


FIG. 3



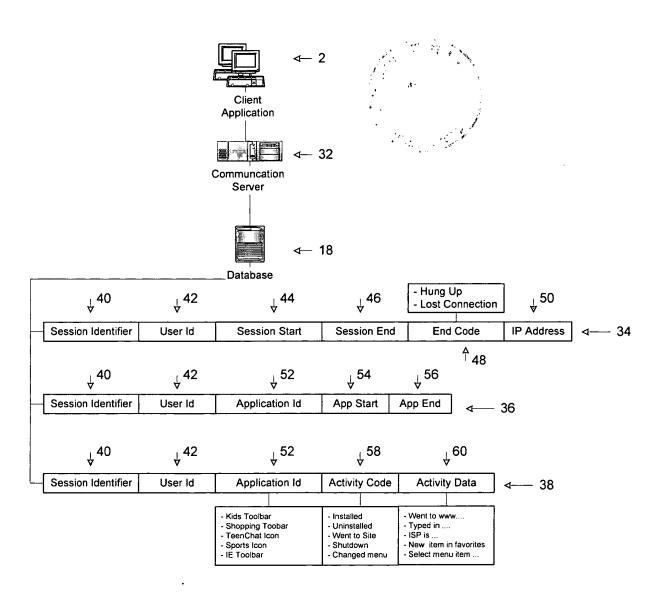


FIG. 4

	DATA POINT	DESCRIPTION
42	User Identifier	Unique identifier for the user. This is a 38-character field.
72	User Number	Internal number used for foreign key within the database system.
50 →	IP Address	Last IP address of user
74 <b></b>	Country Code	Country code of user based on last login
76 <del></del>	Last Login	Last login date

FIG. 5

		DATA POINT	DESCRIPTION
72	<b></b>	User Number	Internal number used for foreign key within the database system.
82	<b></b>	Application Identifier	Application that is in session with server.
50	<b>→</b>	IP Address	IP address used during session.
44	<b></b>	Session Start	Time and date of start of session.
46	<del></del>	Session End	Time and date of end of session.
40	<b></b>	Session Identifier	Unique session identifier.


FIG. 6

	DATA POINT	DESCRIPTION
82	Application Identifier	Unique identifier of the application.
84>	Application Name	Text name to describe Application identifier such as Shopping Toolbar, TeenChat, etc.
86>	Application Message Interval	Indicates the frequency at which a new message should be provide to the client from the message queue. Time in seconds.
88	Welcome Wait Interval	Indicates how long to wait before requesting the next display message from the message queue. Time in seconds.
90	Client Query Time Interval	How frequently the client should query the server for information. Time in seconds.
92>	Application Version	Current version of the application.
94>	Application Update URL	For auto-update – where to find the newest version of the application.

FIG. 7

•	DATA POINT	DESCRIPTION
82	Application Identifier	Unique identifier of the application.
74	Country Code	Country code of message. A default will be used for countries not listed.
102	Navigation URL	URL to navigate

FIG. 8



	DATA POINT	DESCRIPTION
82	Application Identifier	Unique identifier of the application.
310>	Behavior Type	Type of user, Finance, Sports, Style, etc. The behavior type of <i>Style1-Style1000</i> is reserved for the style of presentation.
312	Tag Name	Application specific information tag.
314	Value Name	Application specific value for tag.

FIG. 9

	DATA POINT	DESCRIPTION
72 <b>→</b>	User Number	Internal number used for foreign key
		within the database system.
112	User Behavior Type	Type of user, Finance, Sports, etc.
114	Weight	How the type weighs against other
114		types.

FIG. 10



	DATA POINT	DESCRIPTION
72	User Number	Internal number used for foreign key within the database system.
40	Session Identifier	Unique Session Identifier.
320 →	Domain	Domain part of URL.
322>	Page	Page part of URL within domain.
324	Page Type	Type of page (sports, finance, etc), if this can be determined.
326 →	Duration	Number of seconds spent on this page.

FIG. 11

	DATA POINT	DESCRIPTION
72 <b></b>	User Number	Internal number used for foreign key within the database system.
82>	Application Identifier	Unique identifier of the application.
92>	Application Version	Version of users' application. For informational purposes only.
122	Download Date	Date application was downloaded
<b>*</b>	Last Login	Last date user used this application
124	Last Message Id	The last message Id the client has
126 —		displayed.

FIG. 12

	DATA POINT	DESCRIPTION
82	Application Identifier	Unique identifier of the application.
132>	DayYear	Date representation of day of year and year
134>	Event Code	Code for an application event such as POPUP, NAV, UNINSTALL, etc.
136	Count	Number of times event code occurred for a given day.

FIG. 13

	DATA POINT	DESCRIPTION
82	Application Identifier	Unique identifier of the application.
112	Behavior Type	Behavior Type to send this message. Users with this Behavior Type will receive this message. A Behavior Type of ALL will allow all users to receive this message.
152	Message Number	A system assigned sequential number.  Messages are displayed in sequential order to the user.
154	Messages	Messages to be displayed in sequential order to the user.
74	Country Code	Country code of message. A default code will be used for countries not listed.
156	URL	Fully qualified URL
158	Browser Mode	The mode the browser window will be displayed. Either small dialog window or full browser.
160	Popup Mode	The method the browser window will be displayed. Either popup or pulse icon.
162	Browser Width	The width of the browser window.
164	Browser Height	The height of the browser window.

FIG. 14

DESCRIPTION		AVAILABILITY
Time	Current time.	
User Identifier		ssigned to each client. This is a ster value.
User IP	IP address of the	
Activity		ibe activity.
	POPUP	A popup message was received
	CLICK	The Wink tray icon was clicked to bring up a dialog box (for icons that have dialog boxes)
	NAV	The user navigated to the site.
	SESSION	End-of-session record.
	UNINSTALL	The user uninstalled their software
	HELP	User clicked on the HELP button.
	FIRSTTIME	This is first-time user that downloaded the software. Only users without a Wink Id send this message.
	FIRSTTIMEDL	Same as FIRSTTIME, but the user downloaded the software via the quick downloader.
	AGREE	Agreed to terms and conditions.
	DISAGREE	Disagreed with terms and conditions.
	REINSTALL	The user downloaded and installed the software over the existing installation. The software version are the same.
Activity Info1	Activity specific information.	
	POPUP SESSION	Document number. Start time of session.
Activity Info2	Activity specific inf	
	POPUP	Document URL.
	SESSION	Duration of session in
	Time User Identifier  User IP Activity  Activity Info1	Time Current time. User Identifier Unique identifier a thirty-eight-characted User IP IP address of the IP address of the IP Activity Text field to describe IP CLICK  NAV  SESSION UNINSTALL  HELP  FIRSTTIME  FIRSTTIME  AGREE  DISAGREE  REINSTALL  Activity Info1  Activity specific informula Information Inf

FIG. 15

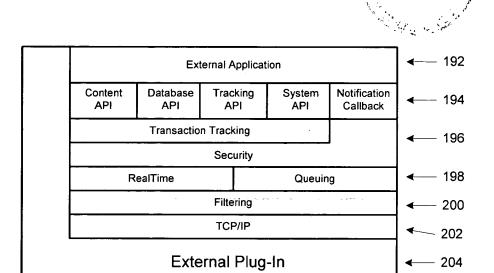


FIG. 16



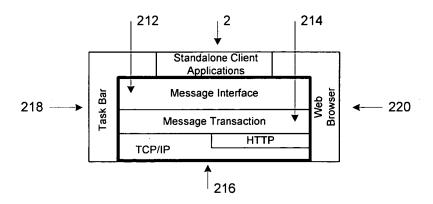


FIG. 17

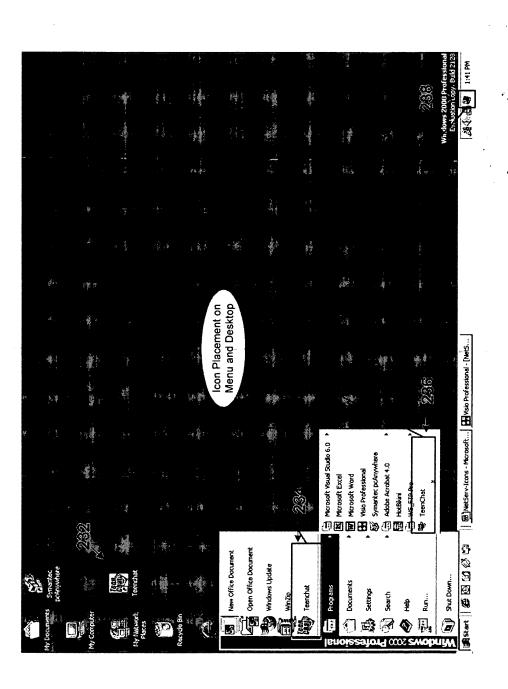


FIG. 18

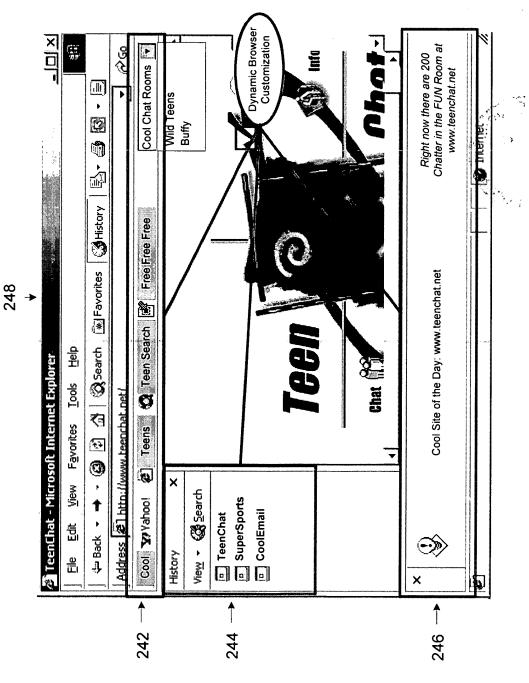


FIG. 19

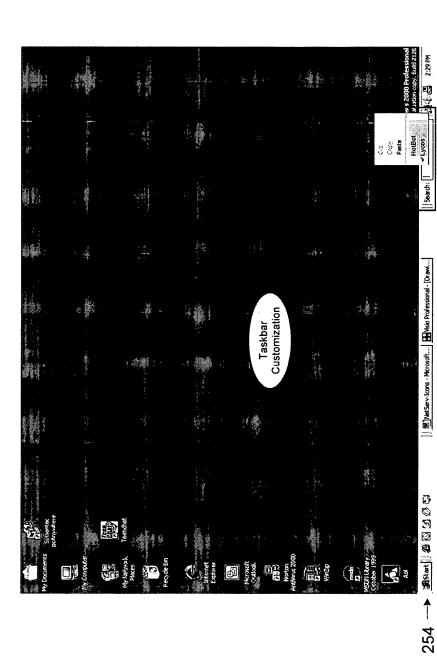


FIG. 20